


CONTI® POLYFLAT

Flat belt for space-saving drive configurations in lift systems


Properties:

- ▶ wear-resistant
- ▶ oil- and grease-resistant
- ▶ resistant to fuel and benzene
- ▶ hydrolysis stabilized
- ▶ resistant to UV and ozone
- ▶ temperature range from -30°C to +80°C (please request technical advice for temperatures below -10°C and above +50°C)
- ▶ can be welded with thermoplastics
- ▶ raw materials and production are silicone free

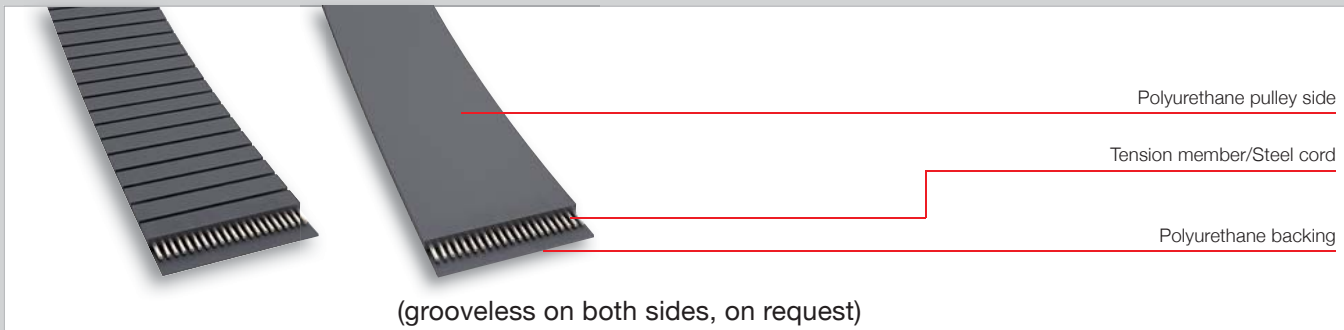

F

Profile	Belt width (mm)
HF	10 - 100
HP	10 - 120
HS	10 - 120
XHP	15 - 120
XHS	40 - 120

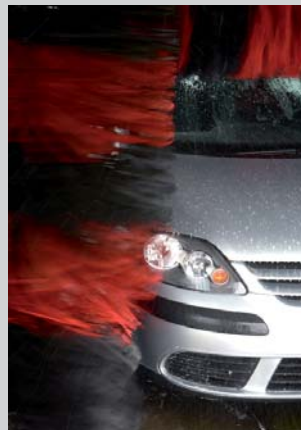

Power Transmission Group

Market segment
Industry

Contact
ContiTech Antriebssysteme GmbH
D-30169 Hannover
Phone +49 511 938 - 71
industrie.as@ptg.contitech.de

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2012 ContiTech AG. All rights reserved. For complete information go to: www.contitech.de/disc_en