


# CONTI® SYNCHRODRIVE

Open-ended polyurethane timing belts for material flow, linear and transport technology, entry systems

## Properties:

- ▶ wear-resistant
- ▶ oil- and grease-resistant
- ▶ resistant to fuel and benzene
- ▶ hydrolysis stabilized
- ▶ resistant to UV and ozone
- ▶ temperature range from -30°C to +80°C (please request technical advice for temperatures below -10°C and above +50°C)
- ▶ can be welded with thermoplastics
- ▶ raw materials and production are silicone free

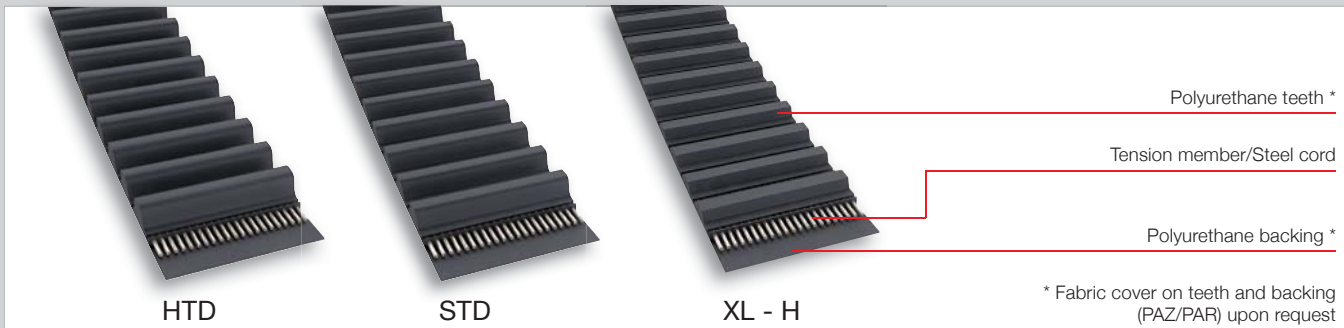

## HTD

Profile	Belt width (mm)
HTD 3M	5 - 50
HTD 5M	5 - 50
HTD 8M	10 - 100
HTD 14M	25 - 120

## STD

Profile	Belt width (mm)
STD S3M	5 - 50
STD S5M	5 - 50
STD S8M	10 - 100

## XL - H

Profile	Belt width (1/100 inch)
XL	25 - 200 (6.35 - 50.8 mm)
L	50 - 200 (12.7 - 50.8 mm)
H	50 - 400 (12.7 - 101.6 mm)

## Power Transmission Group

Market segment  
Industry

Contact  
ContiTech Antriebssysteme GmbH  
D-30169 Hannover

Phone +49 511 938 - 71  
industrie.as@ptg.contitech.de

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2012 ContiTech AG. All rights reserved. For complete information go to: [www.contitech.de/disclosure](http://www.contitech.de/disclosure)